


Lighting Layout Request Form Project Date:

Dealer:	End User:		
Contact:	Contact:		Phone:
Email:	Email:		
Phone:	Street:		
Project ID:	City:	State	: Zip:

Power Available:

For your FREE layout please provide Nanolux with all of the following information. Missing data may result in a less efficient layout. Complete this form as thoroughly as possible.

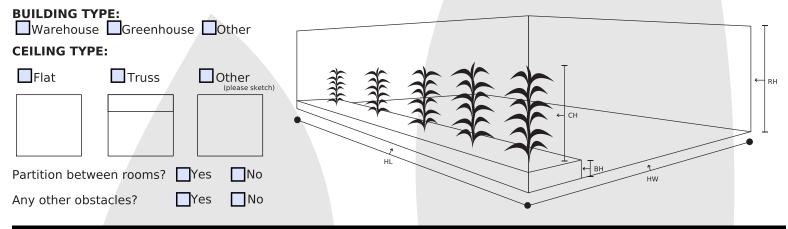


Number of Rooms	Length (HL)	Width (HW)	Ceiling Height (RH)	Bench Height (BH)	Crop Height (CH)

BED/BENCH LAYOUT:

Stationary Rolling benches Ground beds

Please submit separate drawing if there are variable bench sizes or positions

ORIENTATION:

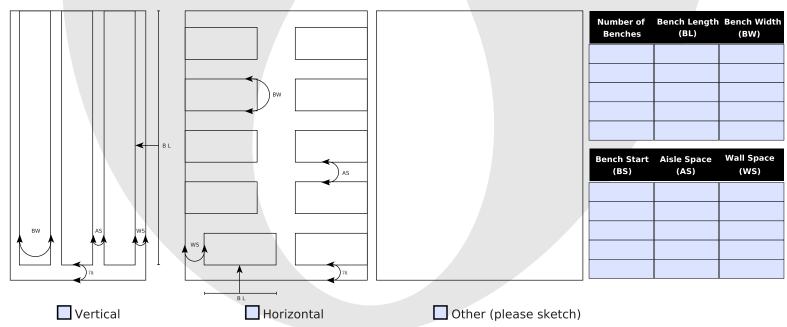



CROP STAGE: Propagation Vegetative Flowering		YCLE: Hours of Light Hours of Darkness	PPFD (µmol - or- DLI (mo						
LED EX Module LED ZX Series LED TOP Series LED SN Series LED PAD Series LED PGF18 MH HPS CMH	18W 600W DE	1200W 1200W 1200W	CHECKERBOARD MIXED LAMP TECHNOLOGY? NO YES, SPECIFY:	COMMERCIAL HANGING BRACKET NEEDED? NO YES					
VOLTAGE: ☐ 90-100V ☐ 120V ☐ 208V ☐ 220-240V	☐ 277V ☐ 347V ☐ 380V ☐ 480V		UNIFORMITY REQUIREMENTS: Design for fewest fixtures (may result in lower uniformity) Design for highest uniformity (may result in more fixtures)						
If you are unsure about your options, reach out to a Nanolux expert for help!									
Standard Power Cord/Plug Information									
STANDARD PLUG	TWIST LOCK PLUG	TWIST LOCK PLU	G NORTH AMERICAN STANDARD	380V EU STANDARD					
208/240V	277V	347V	347V/380V/480V	380V					
6-15P	L7-15P	L24-20P							
			For intern	al use only					