


LED SN720 Pro

- ✓ Full spectrum/ UV/ IR can be controlled separately
- ✓ Tailored preset spectrum can better promote plant growth
- ✓ Foldable for easy handling
- ✓ Wide input voltage 120V-277V
- ✓ NCCS-RTU&0-10V controll

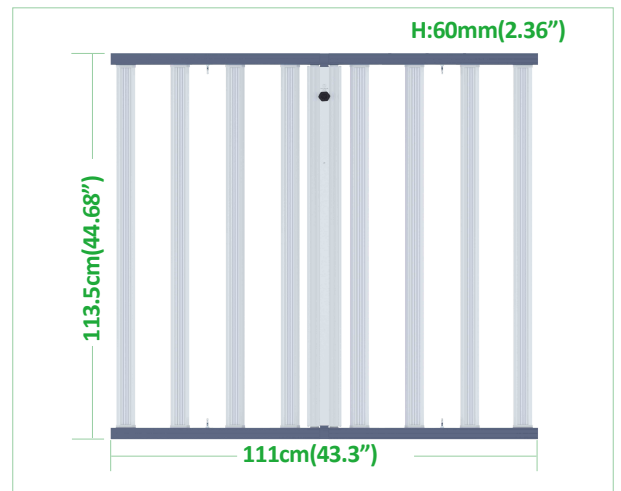

Nominal Electrical Ac Input*

PPFD(umol/m ² /s)---Height 30cm(12")							
362	490	527	540	526	536	597	381
571	760	839	851	860	848	785	603
675	942	1047	1057	1055	1055	977	741
785	1045	1162	1170	1165	1167	1065	802
801	1097	1218	1229	1228	1229	1112	856
784	1087	1202	1208	1208	1211	1129	816
673	840	1046	1067	1060	1041	965	736
457	612	686	695	700	695	622	501

PPFD(umol/m ² /s)---Height 60cm(24")							
298	369	415	431	431	412	368	308
392	485	540	573	573	549	488	398
458	577	654	685	693	658	588	483
508	629	720	756	761	730	651	531
522	653	742	784	786	758	679	554
508	635	713	755	760	727	652	528
440	557	627	671	674	645	583	469
358	448	497	532	542	525	458	382

Specifications

Product Model	LED SN720 Pro
Product code	80.01.0345
Input power	720W
Dimming	30%~100%
Input voltage	AC 120V-277V
Light output PPF	2090 $\mu\text{mol/s}$
Efficiency	2.9 $\mu\text{mol/J}$
Input frequency	50/60Hz
Light distribution	120°
Mounting height	8" - 24" (20-60cm) above canopy
Operating temperature	0°C~35°C
Operating humidity	0~95%
Power factor	≥ 0.97
Total harmonic distortion	< 15%
Requirement of installment	Comply with ETL/CE/EAC certificate
Lifetime L90	> 50,000hrs
IP rating	IP65
Product dimensions	1135x1110x60mm
Product weight	10.2KG
Packing dimensions	1160x140x620mm
Gross weight	13.3KG
Warranty	5 years standard warranty
Loading Quantity	20GP: 294 Cartons 40HQ: 692 Cartons 40GP: 614 Cartons

Nominal Electrical Ac Input*

AC VOLTAGE	120V	208V	220V	240V	277V
AC Current	6.40A	3.49A	3.29A	3.01A	2.59A
AC Power	768W	726W	724W	722W	720W
Power Factor	0.99	0.99	0.99	0.98	0.98

* At 25°C (77°F) Ambient Temperature

4 kind of spectrum available

